


DIMENSIONAL DATA

BLIND FLANGE DIMENSIONS

ASME B16.5 · Class 150 · Metric mm · Table 8 · mm.

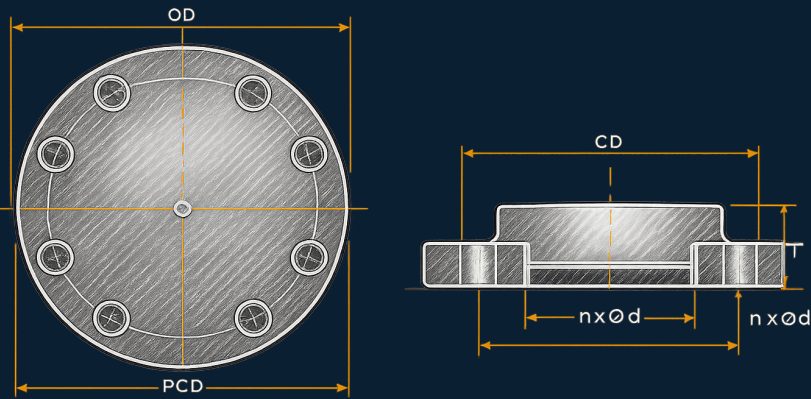

NPS	Flange OD (O)	Thickness (T)	Bolt Circle Dia.	No. of Holes	Hole Dia.	Approx. Weight LBS	Approx. Weight KGS
1/2	89	9.7	60.45	4	16	2	0.9
3/4	99	11.2	69.85	4	16	2	0.9
1	108	12.7	79.50	4	16	2	0.9
1-1/4	117	14.2	88.9	4	16	3	1.4
1-1/2	127	15.9	98.55	4	16	4	1.8
2	152	17.5	120.65	4	19.05	5	2.3
2-1/2	178	20.6	139.7	4	19.05	7	3.2
3	190	22.4	152.4	4	19.05	9	4.1
3-1/2	216	22.4	177.8	8	19.05	13	5.9
4	229	22.4	190.5	8	19.05	17	7.7
5	254	22.4	215.9	8	22.35	20	9
6	279	23.9	241.3	8	22.35	27	12.2
8	343	26.9	298.45	8	22.35	47	21.3
10	406	28.4	361.95	12	25.4	70	31.7
12	483	30.2	431.8	12	25.4	122.1	55.4
14	553	33.3	476.25	12	28.70	140	63.5
16	597	35.1	539.75	16	28.70	178.6	81.6
18	635	38.1	577.85	16	31.75	218.3	99
20	698	41.1	635	20	31.75	282.9	128.3
22	749	44.4	692.15	20	35.05	352.3	159.8
24	813	46	749.3	20	35.05	426.6	193.5

Dimensions are based on ASME B16.5 Class 150 flange requirements. Refer to the applicable standard for complete dimensional requirements.